



Molded Stair Treads

Molded stair treads offer the same great advantages that come with molded grating. Available in both a square mesh and rectangular mesh with a 1.5" nosing, these stair treads are easy to install and require little to no maintenance. All stair treads come standard with a gritted, non-slip surface.

| Mesh (in) | Thickness (in) | Width (in) | Length (ft) | Maximum Span for 300 lbs @ Mid-span | | Open Area | Panel Weight |
|-----------|----------------|------------|-------------|-------------------------------------|-------------------------|-----------|--------------|
| | | | | 1/8" or less deflection | 1/4" or less deflection | | |
| 1.5 x 1.5 | 1.5 | 22 | 10 | 30 | 37 | 69% | 75 |
| 1.5 x 6 | 1.5 | 22 | 10 | 30 | 37 | 67% | 60 |

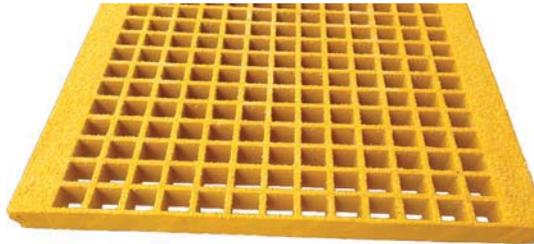


| Part Number | Thickness (in) | Resin | Surface | Color | Width (in) | Length (ft) | Availability |
|--------------------|----------------|-------------------|---------|-----------|------------|-------------|--------------|
| MT1515-PP-DGY-2210 | 1.5 | Premium Polyester | Gritted | Dark Gray | 22 | 10 | Stock |
| MT1515-PP-Y-2210 | 1.5 | Premium Polyester | Gritted | Yellow | 22 | 10 | Stock |
| MT1516-PP-DGY-2210 | 1.5 | Premium Polyester | Gritted | Dark Gray | 22 | 10 | Non Stock |
| MT1516-PP-Y-2210 | 1.5 | Premium Polyester | Gritted | Yellow | 22 | 10 | Non Stock |

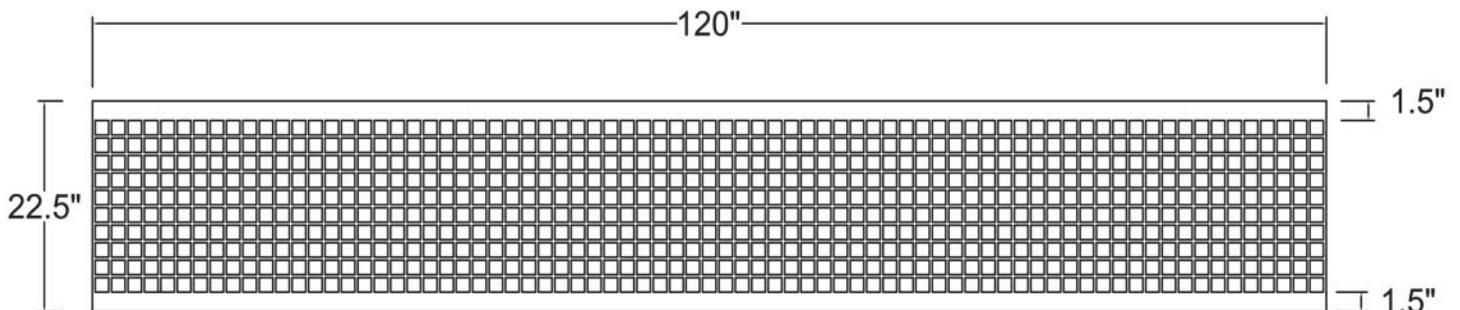

Pultruded Stair Treads

Pultruded stair treads offer the same level of safety, strength and corrosion resistance that comes standard with pultruded grating. Superior in strength compared to molded stair treads, these treads are designed for applications where wider support spans are required. These treads are offered in a variety of colors and depths of 1", 1-1/2" and 2". All pultruded treads can be supplied custom cut to meet the customer's specifications or in standard lengths of 12'. All stair treads come standard with a gritted, non-slip surface.

| Thickness (in) | Width (in) | Length (ft) | Maximum Span for 300 lbs @ Mid-span | |
|----------------|------------|-------------|-------------------------------------|--------------|
| | | | 1/8" or less | 1/4" or less |
| 1 | 11 | 12 | 28 | 36 |
| 1.5 | 11 | 12 | 39 | 51 |
| 2 | 12 | 12 | 46 | 58 |

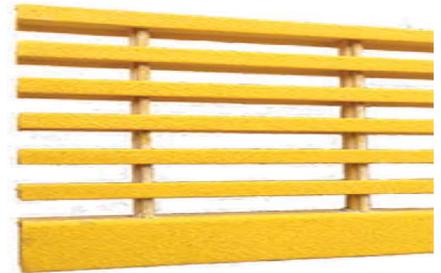

| Part Number | Thickness (in) | Resin | Surface | Color | Width (in) | Length (ft) | Availability |
|--------------------|----------------|-------------------|---------|-----------|------------|-------------|--------------|
| PT6010-PP-DGY-1112 | 1 | Premium Polyester | Gritted | Dark Gray | 11 | 12 | Stock |
| PT6010-PP-Y-1112 | 1 | Premium Polyester | Gritted | Yellow | 11 | 12 | Stock |
| PT6015-PP-DGY-1112 | 1.5 | Premium Polyester | Gritted | Dark Gray | 11 | 12 | Non Stock |
| PT6015-PP-Y-1112 | 1.5 | Premium Polyester | Gritted | Yellow | 11 | 12 | Non Stock |
| PT6015-PH-B-1112 | 1.5 | Phenolic | Gritted | Brown | 11 | 12 | Non Stock |
| PT5020-PP-DGY-1212 | 2.0 | Premium Polyester | Gritted | Dark Gray | 12 | 12 | Non Stock |
| PT5020-PP-Y-1212 | 2.0 | Premium Polyester | Gritted | Yellow | 12 | 12 | Non Stock |

